



# Rim Repair Systems Jant Düzeltme Sistemleri

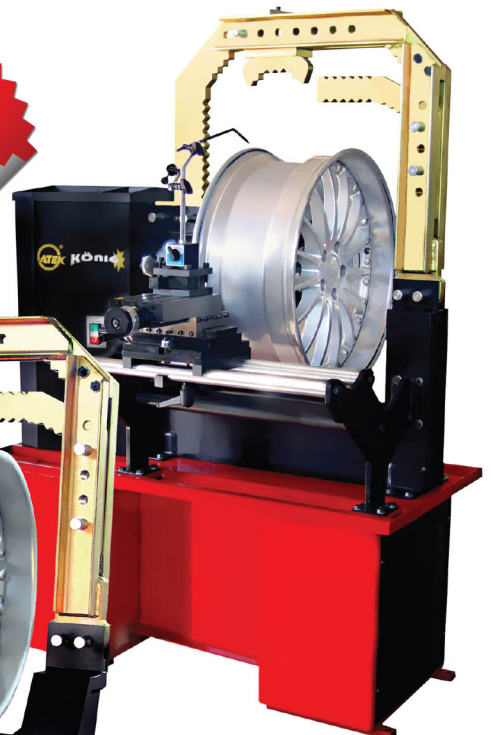

**KÖNIG 55K 00**  
62 00CE

**JUMBO K**  
23K 00

**JUMBO**  
23 00



Moving Lathe  
Kayar Tip Torna



Moving Lathe  
Kayar Tip Torna



Gear Box  
Redüktörlü



**10"-24"**

Rim Diameter  
Jant Çapı

**JUMBO / JUMBO K / KÖNIG 55K 00 10"-24"**

## JUMBO 23 00



Standard Accessories  
Standart Aksesuarlar



Moving Lathe  
Kayar Tip Torna



Standard Big  
Support Kit  
Standart Büyük  
Dayama Kiti



Dear Box  
Redüktörlü



Optional CE  
24V DC  
Opsiyonel CE  
24 V DC

## JUMBO K 23K 00



Standard Accessories  
Standart Aksesuarlar



Moving Lathe  
Kayar Tip Torna



Standard Bridge  
Support Kit  
Standart Köprülü  
Dayama Kiti



Dear Box  
Redüktörlü



Optional CE  
24V DC  
Opsiyonel CE  
24 V DC

## KÖNIG 55K 00 55K 00



Optional Polish  
& Clean Kit  
Opsiyonel Polisaj  
ve Temizleme Kiti



Standard Accessories  
Standart Aksesuarlar



Moving Lathe  
Kayar Tip Torna



Standard Bridge  
Support Kit  
Standart Köprülü  
Dayama Kiti





Dear Box  
Redüktörlü





Optional CE  
24V DC  
Opsiyonel CE  
24 V DC

|                                                                                 | JUMBO<br>23 00  | JUMBO K<br>23K 00 | KÖNIG 55K 00<br>55K 00 |
|---------------------------------------------------------------------------------|-----------------|-------------------|------------------------|
| Height<br>Yükseklik<br>Высота<br>Височина                                       | 1653 mm         | 1800 mm           | 1710 mm                |
| Depth<br>Derinlik<br>Длина<br>Дължина                                           | 1425 mm         | 1425 mm           | 972mm                  |
| Width<br>Genişlik<br>Ширина<br>Широчина                                         | 912 mm          | 912 mm            | 1198 mm                |
| Working pressure<br>Çalışma basıncı<br>Рабочее давление<br>Работно налягане     | 140 bar         | 140 bar           | 140 bar                |
| Net weight<br>Net ağırlık<br>Собственный вес<br>Собственно тегло                | 330 kg          | 365 kg            | 370 kg                 |
| Hydraulic engine<br>Hidrolik motor<br>Гидромоторы<br>Хидравличен мотор          | 0,55kW / 0,75hp | 0,55kW / 0,75hp   | 0,55kW / 0,75hp        |
| Working engine<br>Hareket motoru<br>Электродвигатель<br>Електро двигател        | 0,75kW / 1hp    | 0,75kW / 1hp      | 0,75kW / 1hp           |
| Rotating speed<br>Dönme hızı<br>Скорость вращения- об/мин<br>Скорост на въртене | 5-98 rpm        | 5-98 rpm          | 5-98 rpm               |



## JUMBO 23 00



## JUMBO K 23K 00



## KÖNIG 55K 00 55K 00



Optional Single Phase / Opsiyonel Monofaze Motor / На выбор- однофазный двигатель / По Избор Монофазен Двигател

JUMBO / JUMBO K / 55K 00 10"-24"

Technical Features  
Teknik Özellikler